

5 Direction Tact switch

TSFC type

TSFC01 Series



(size : 17.4×17.4×8.5)

4 Direction Tact switch

■ Features

Available shprp click feel with a positive tactile feedback.

Insert molding in the contact with special treatment prevents flux build-up during soldering and permits auto-dipping.

■ Applications

Operation switches for menu scrolling and confirmation for portable equipment
Compact, portable unit such as cameras, PDA etc.

■ Main Specifications

Rating	50mA 12V DC
Travel	2 ±0.3mm
Contact Resistance	100mΩ Max
Operating temperature	-20°C~70°C (45%~85% RH)
Operating Force	130±30gf
Operating Life(Cycle)	20,000

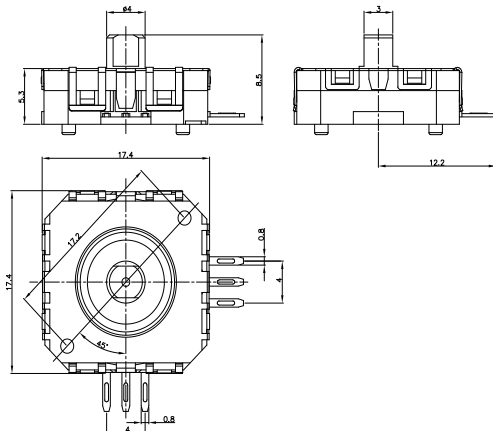

■ Products Line

TSFC01 - MPAA

Products No.	O/D	Terminal Type	Guide Boss	Drawing No
MPAA	Horizontal	P-bent	With	1

■ Dimensions

TSFC01-MPAA

No.	3D Style	Dimension Type (Unit : mm)	PCB pattern dimension Circuit Diagram																																									
1	MPAA																																											
			<table><tr><th>Direction</th><th colspan="6">Terminal</th></tr><tr><th></th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th></tr><tr><td>↑</td><td>○</td><td>○</td><td></td><td></td><td></td><td></td></tr><tr><td>↓</td><td></td><td></td><td>○</td><td>○</td><td></td><td></td></tr><tr><td>←</td><td></td><td></td><td></td><td></td><td>○</td><td>○</td></tr><tr><td>→</td><td></td><td></td><td></td><td>○</td><td>○</td><td></td></tr></table>	Direction	Terminal							1	2	3	4	5	6	↑	○	○					↓			○	○			←					○	○	→				○	○
Direction	Terminal																																											
	1	2	3	4	5	6																																						
↑	○	○																																										
↓			○	○																																								
←					○	○																																						
→				○	○																																							