

HOOK switch



TSHA type

TSHA02 Series



(size : 24.3×14.6×8.2)

■ Features

Using slide Contact enhances reliability
 Various actuator lever style.
 Low profile with thickness of 8mm

■ Applications

All telephone.
 Video phone equipments.

■ Main Specifications

| | | |
|-----------------------|-------------------------|--|
| Rating | 0.2A 48V DC | |
| Contact Resistance | 100mΩ Max | |
| Operating temperature | -20°C~70°C (45%~85% RH) | |
| Operating Force | 70gf Max. | |
| Operating Life(Cycle) | 100,000 | |

■ Products Line


TSHA02 - □□50
 (Products No.)

| Products No. | Operating Type | Terminal Type | Guide Boss | Drawing No |
|--------------|----------------|---------------|------------|------------|
| SA50 | - | Standard | With | 1 |
| SB50 | | A LEVER | With | 2 |
| SC50 | | C LEVER | With | 3 |
| RD50 | Reverse | B LEVER | With | 4 |

▶ Bulk or Tray packin type.

Time Lag Diagram

Travel Position (x)

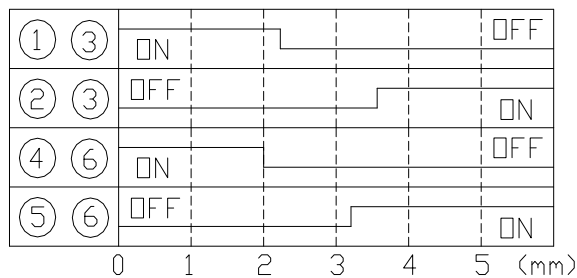

T
S
H

■ Dimensions

TSHA02-□□50

| No. | 3D Style | Dimension Type (Unit : mm) | PCB pattern dimension Circuit Diagram |
|-----|----------|----------------------------|--|
| 1 | SA50 | | |
| | | | |
| 2 | SB50 | | |
| | | | |
| 3 | SC50 | | |
| | | | |
| 4 | RD50 | | |
| | | | |