


TACT switch



TSTA type

TSTA01 Series



(size : 3.9×3.6×1.5) Side push Surface mount type

T
S
T

■ Features

Surface mount type tact switch.
 Reflow solderable.
 Horizontal operating direction.
 Dust&Moisture protective structure.

■ Applications

Various controls for devices in automotive.
 Controls for image/sound devices, radio equipment.
 Operating signal input switches, etc.

■ Main Specifications

Rating	50mA 12V DC
Travel	0.2±0.1mm
Contact Resistance	100mΩ Max
Operating temperature	-20°C~70°C (45%~85% RH)
Bounce	10m sec Max
Operating Force	160±40gf 250±60gf
Operating Life(Cycle)	100,000 50,000

■ Products Line




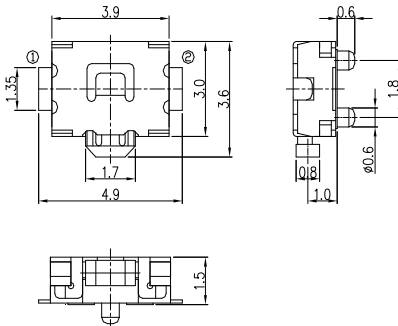





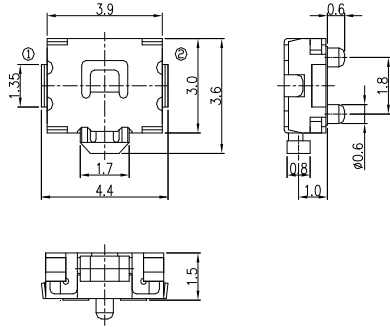


TSTA01 - □□□□□ □□
 (Products No.) (0/F)

Products No.	0/F	0/D	Terminal Type	Guide Boss	Drawing No
DF00A	□□	Horizontal	Flat	With-out	1
DFWOA	□□		Flat	With	2
DJ00A	□□		J-bent	With-out	3
DJWOA	□□		J-bent	With	4

Operating Force	□□	160±40gf	16	250±60gf	25
-----------------	----	----------	-----------	----------	-----------

■ Dimensions

TSTA01-□□□□ □□

No.	3D Style	Dimension Type (Unit : mm)	PCB pattern dimension Circuit Diagram
1	DF00A □□		 
	DFWOA □□		 
3	DJ00A □□		 
	DJWOA □□		 

T
S
T