

# Potentiometer switch

## TEEV type

### TEEV01 Series



(size : 12.7×16.8×h)

Snap-in Type

#### ■ Features

Low-profile type

Easy to be designed into applied applications

Non operation feeling type is available

#### ■ Applications

Digital still cameras and digital video camcorders

Operation of various digital devices.

#### ■ Main Specifications

Total Resistance	KΩ ± %20
Rated Wattage	0.1W
Operating Voltage	DC 150V Max
Tap residual Resistance	Less than 300Ω for Tml 1 To 2 and 2 To 3
Total Rotation Angle	300° ± 10°
Rotational Torque	20 - 200gf
Operating Life(Cycle)	10000

#### ■ Products Line

TEEV01 - □□ □□

(Shaft, (Hight, (Resistance)

Products No.	Hight	Torque	Rotation Angle	Drawing No
A□□□	25mm/30mm	20 - 200gf	300° ± 10°	1
BA□□	15mm	20 - 200gf	300° ± 10°	1

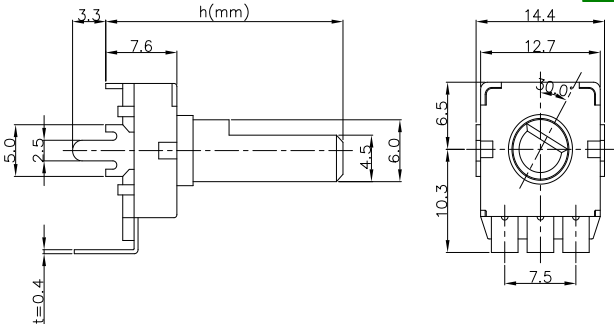

A□ Hight □	
25mm	A
30mm	B

Resistance □	
10K	10
20K	20
50K	50

Shaft Type □	
A-Shaft (A)	SK-Shaft (B)

■ Dimensions

TEEV01-□□□□

No.	3D Style	Dimension Type (Unit : mm)	PCB pattern dimension Circuit Diagram						
1	A□□□	<table border="1" data-bbox="1043 300 1125 389"> <tr> <td>□</td> <td>h</td> </tr> <tr> <td>A</td> <td>####</td> </tr> <tr> <td>B</td> <td>####</td> </tr> </table> 	□	h	A	####	B	####	
□	h								
A	####								
B	####								
2	BA□□	