


TACT switch



TSTB type

TSTB01 Series

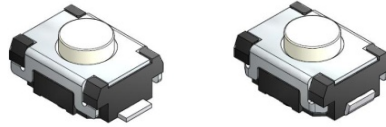

(size : 3.9×2.9×h)

Vertical push Surface mount type

T
S
T

■ Features

- Surface mount type tact switch.
- Reflow solderable.
- Vertical operating direction.
- Dust&Moisture protective structure.

■ Applications

- Various controls for devices in automotive.
- Controls for image/sound devices, radio equipment.
- Operating signal input switches, etc.

■ Main Specifications

| | |
|-----------------------|-------------------------|
| Rating | 50mA 12V DC |
| Travel | 0.13±0.05mm |
| Contact Resistance | 100mΩ Max |
| Operating temperature | -20°C~70°C (45%~85% RH) |
| Bounce | 10m sec Max |
| Operating Force | 160±40gf 250±60gf |
| Operating Life(Cycle) | 100,000 100,000 |

■ Products Line

TSTB01 -
(Products No.) Height (O/F)

| Products No. | h | O/F | O/D | Terminal Type | Guide Boss | Drawing No |
|--------------|--------------------------|---|----------|---------------|------------|------------|
| CFOO | <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | Vertical | Flat | With-out | 1 |
| CFWO | <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | | Flat | With | 2 |
| CJOO | <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | | J-bent | With-out | 3 |
| CJWO | <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | | J-bent | With | 4 |

| Height <input type="checkbox"/> | |
|---------------------------------|---|
| 2.0mm | A |
| 2.5mm | B |

| Operating Force <input type="checkbox"/> <input type="checkbox"/> | |
|---|-----------|
| 160±40gf | 16 |
| 250±60gf | 25 |

■ Dimensions

TSTB01-□□□□ □ □ □

| No. | 3D Style | Dimension Type (Unit : mm) | PCB pattern dimension Circuit Diagram |
|-----|------------|----------------------------|--|
| 1 | CFOO □ □ □ | | |
| | | | |
| 2 | CFWO □ □ □ | | |
| | | | |
| 3 | CJOO □ □ □ | | |
| | | | |
| 4 | CJWO □ □ □ | | |
| | | | |

T
S
T